



<b>Product line</b>	Flexi Line 2G
<b>Collection</b>	SILENCE PLUS 2G
<b>Code</b>	Depending on configuration – see code chart for details


	STANDARD CONFIGURATION	OPTIONAL CONFIGURATION
<b>Outlet pump*</b>	MAC 11 (DC power: 12V- 24 V)	MAC11 (AC power: 220-240 V 50 or 60 Hz / -110-125V 60Hz)
<b>Seat &amp; Cover</b>	Wooden Polyester	Wooden polyester with Soft Closing / Thermosetting with Soft Closing
<b>Color</b>	White	Bone, Black
<b>Control Panel</b>	All-in-One 1P SFT / All-in-One 2P SFT 	Multiframe 2P SFT / Touch Multifunction SFT 
<b>Water inlet device*</b>	Solenoid (centralized fresh water system)	Inlet pump (single raw water system)
<b>Bidet</b>		- Matching bidet: Bidet Silence Plus 2G - Integrated bidet spray nozzle function with side mounted faucet
<b>Water consumption</b>	0.5 / 2.7 l (0.1-0.7 gal) per flush. The user can easily adjust the water amount.	
<b>Weight</b>	25.5 Kg (56.2 lb) {fully assembled}	

\*see technical data for details

Technical data :

	WIRE GAUGE SIZE CHART	
	Distance from source* is:	
	1-2 m	>2m
<b>12V DC</b>	11 AWG (4.17 mm <sup>2</sup> )	9 AWG (6.63 mm <sup>2</sup> )
<b>24V DC</b>	13 AWG (2.63 mm <sup>2</sup> )	11 AWG (4.17 mm <sup>2</sup> )
<b>110-125V AC 60Hz</b>	18 AWG (0.82 mm <sup>2</sup> )	18 AWG (0.82 mm <sup>2</sup> )
<b>220-240V AC 50Hz or 60 Hz</b>	18 AWG (0.82 mm <sup>2</sup> )	18 AWG (0.82 mm <sup>2</sup> )

\*Distance measured assumed power and ground wires

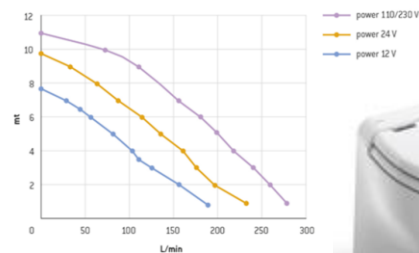

MAC 11 OUTLET PUMP	12V DC	24V DC	110-125V AC 60Hz	220-240V AC 50Hz or 60 Hz
<b>Fuse recommended</b>	40A	30A	8A	5A
<b>Pump performance</b>	Max 270L/min <b>71.3 gpm</b> Max vertical head 11mt <b>36.1 ft</b> Max horizontal distance 90 mt <b>295.3 ft</b>			
<b>Outlet Duck bill valve (male)</b>	1.5" /required ID 1.5" [38.5 mm]			

INLET SOLENOID Centralized system	12V DC	24V DC	110-125V AC 60Hz	220-240V AC 50Hz or 60 Hz
<b>Power consumption</b>	9.5 W	10 W	6 W	6 W
<b>Working pressure recommended</b>	3 bar	3 bar	3 bar	3 bar
<b>Solenoid Inlet and Outlet (threaded female)</b>	1/2"			
<b>Toilet inlet hose fitting (barbed)</b>	20mm			

INLET PUMP Single system (Raw water)	12V DC	24V DC
<b>Fuse</b>	8 A	4 A
<b>Pressure</b>	45 PSI - 3 bar	
<b>Water flow</b>	12 l/min <b>3.17 gpm</b>	
<b>Toilet inlet hose fitting (barbed)</b>	20mm	

<b>Notes:</b>	For versions with integrated bidet function: 3/8" female connection for cold and hot water supply
<b>Box dimension</b>	67cm x 50 cm x 75 cm (LxWxH)
<b>Packaging (units/pallet)</b>	12