


Model range	SANISPLIT NK		
Power	12V - 24V - 230V		
Box material	Plastic		
Color	White		
Weight	8.0 Kg (fully assembled)		
<b>OUTLET PUMP - macerator turbine</b>	<b>12V dc</b>	<b>24V dc</b>	<b>230V ac</b>
Power consumption	40 A	25A	3A
Pump performance	Max 270 l/min - Max vertical head 11mt - Max horizontal distance 90 mt		


**GREY WATER TRANSFER UNIT - PATENTED SPLIT SYSTEM**

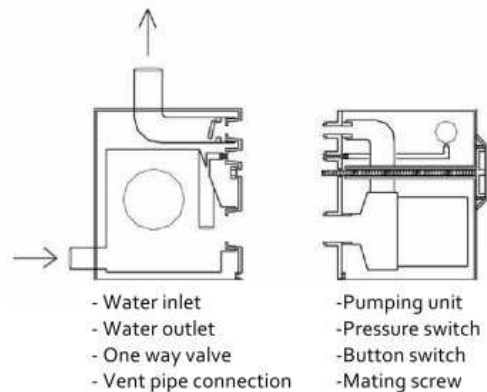

\*Illustration Diagram representing the split system


PIS\_V01\_SANISPLIT NK

**minimal height requirements**

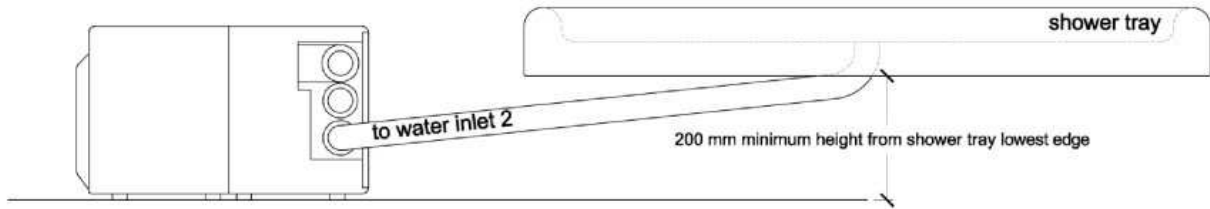

OPTIONAL / remarks	
Features	<ul style="list-style-type: none"> <li>-Patented SPLIT system: the motor pump can be easily replaced or dismantled without disconnecting the hoses connection.</li> <li>-No submergible (IP55)</li> <li>- Max grey water temperature 100 °C</li> </ul>
Mounting location	<ul style="list-style-type: none"> <li>-At least <b>20 cm</b> of pressure head is required to activate the pressure switch</li> <li>-Install Sanisplit 20 cm below lower edge of shower tray.</li> <li>-Consider <b>1 Sanisplit for max: 1 sink + 1 bidet + 1 shower</b></li> </ul>

**NOMINAL PUMP PERFORMANCE**

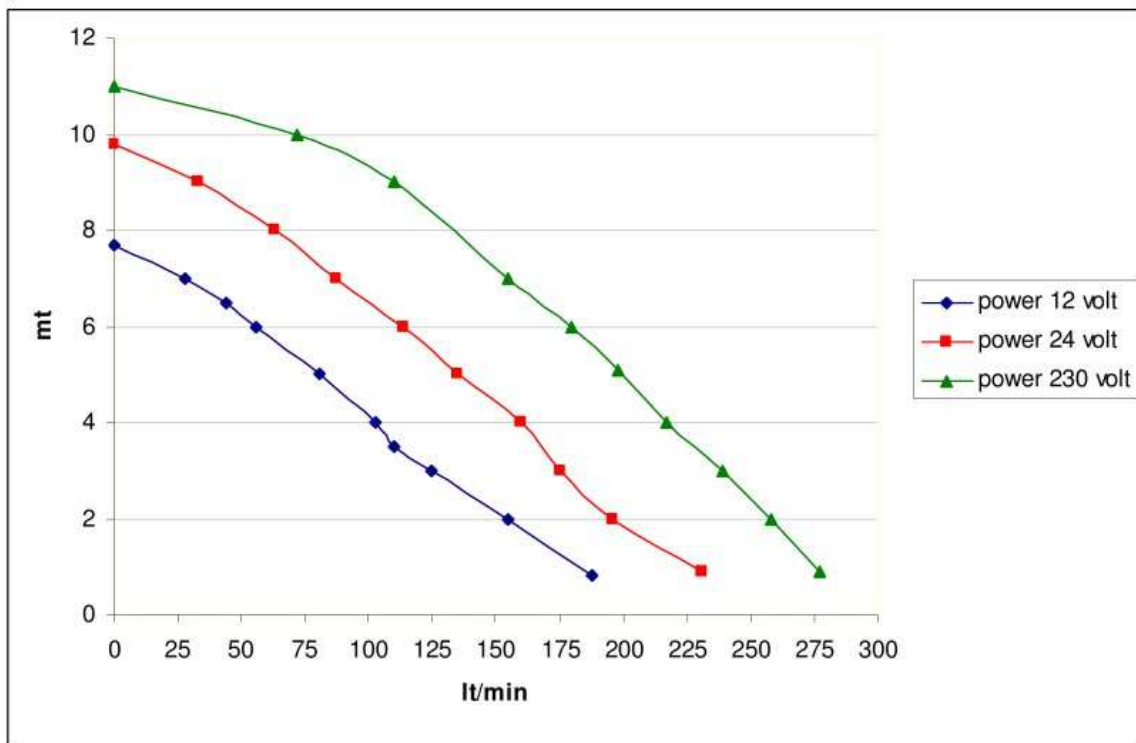

PIS\_V01\_SANISPLIT NK