




# Mounting Instructions

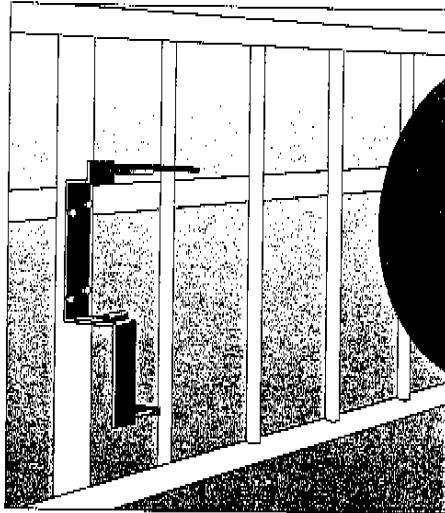


1. Mount the bracket on the vessel using four M8 or 5/16 inch bolts.

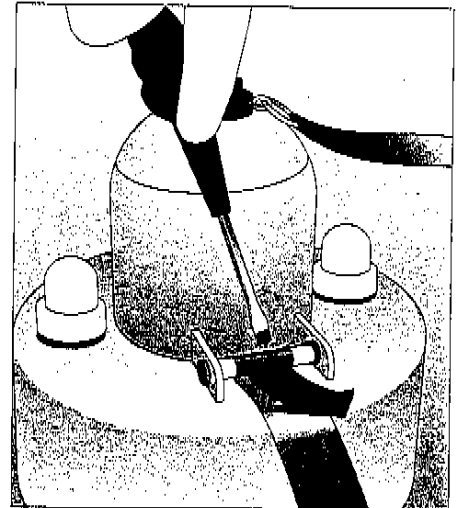

2. Use a sharp object to remove the plastic tube from the MOB. On the MOB Light & Smoke, the two lights should then light up.

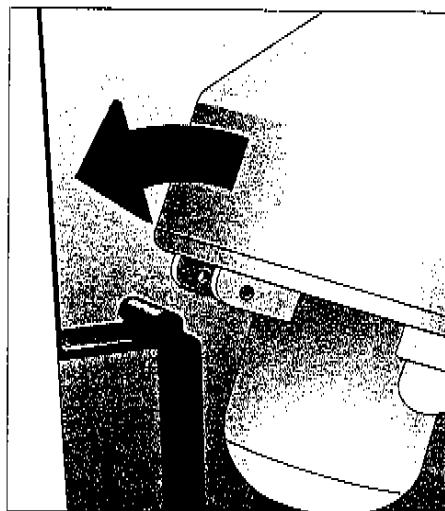

On the MOB Light & Smoke, the two lights should go out if the signal is mounted correctly.

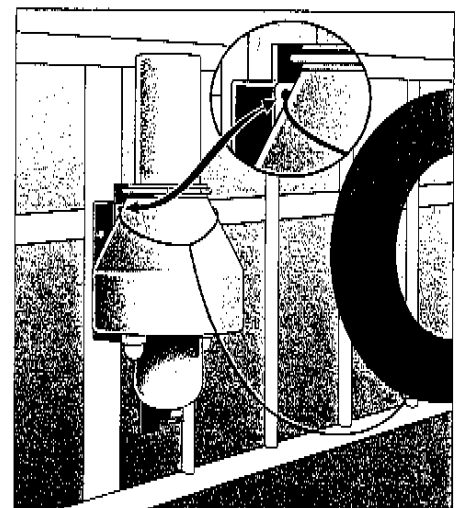


4. Attach the signal to the life buoy with a line of minimum 4 m length and 8 mm diameter. Use a bowline hitch and ensure that the line goes all the way around the signal.

# Method of Operation


The MOB operates automatically when the life buoy is released and has separate ignition systems for light and smoke.

The lights are operated by an integral power source.

The MOB emits light and smoke automatically when it leaves the bracket. After release, smoke is emitted for at least 15 minutes and the two electric lights on MOB Light & Smoke operate for a minimum of 2 hours at 2 candela.

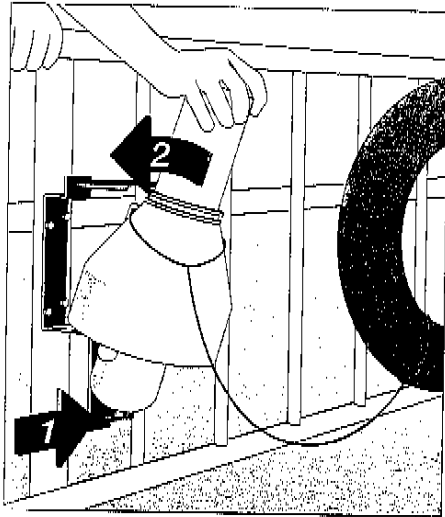

**3.** Fit the MOB in the bracket, the pin into the hole, and the clamp around the body of the MOB.

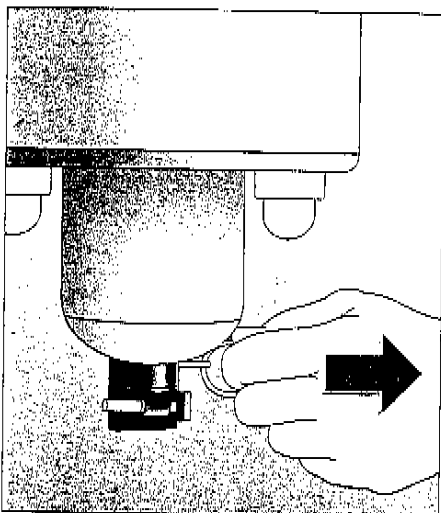

**5.** Remove the transport safety pin. (Keep the safety pin for future use.)

## Manual Operation of Signal

On a craft where the 15 m mounting height is unobtainable, you must mount the signal inboard on the wheelhouse bulkhead and operate and launch the MOB with the life buoy manually. Ensure the life buoy is attached to the MOB.

- 1. Pull the MOB away from the bracket.**
- 2. Immediately throw the MOB overboard.**

