



38 018 99

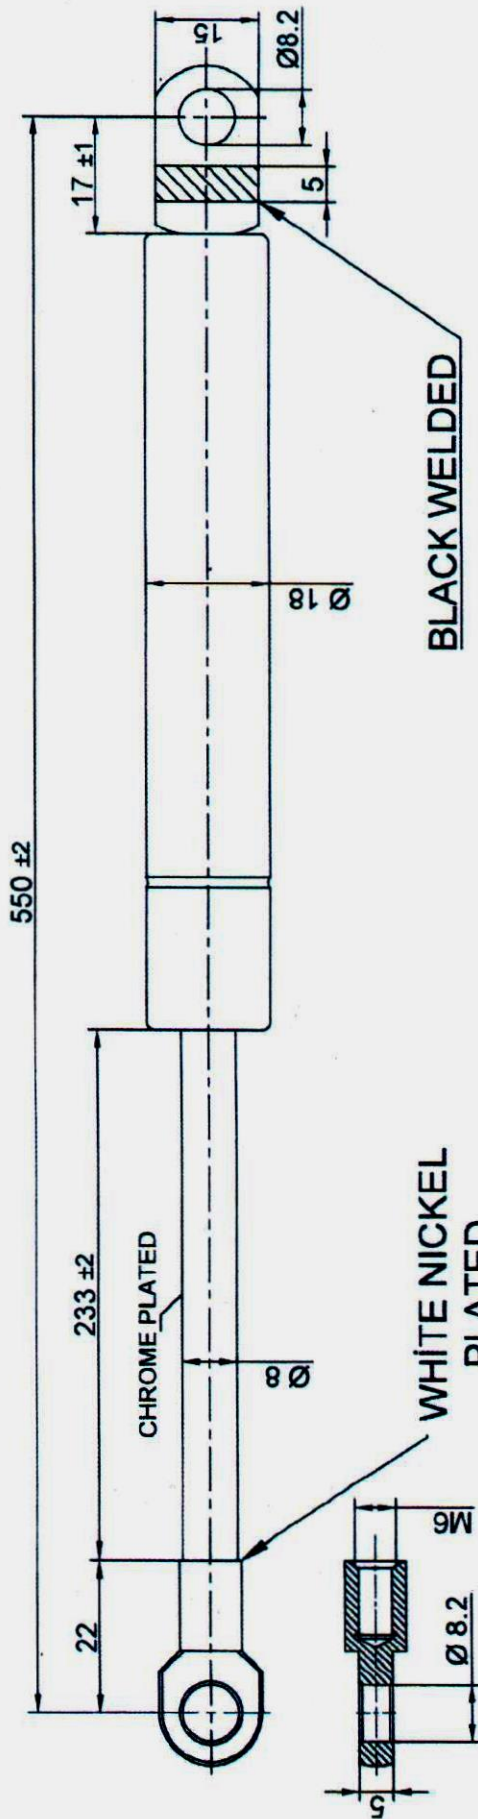

Forces (statically measured)	
F1 (N)	F4 max (N) / FR max (N)
380 + 30 - 30	60

- Tube : Black Painted
- Rod : Chrome Plated
- Rod Fitting : White Nickel Plated
- Labelling : Inkjet White Painted (OSCULATI)

- Installation : With piston rod down to ensure best possible durability performance of the gas spring.
- Permissible operating temperature range - 30 °C to + 80 °C
- Spring test with piston rod downwards
- Precautions in using :
 - Impacts, sparks, paint and corrosives products are to be avoided from the rod surfaces
 - Never expose the gas spring next to a hot source or throw it out in the flames.
 - Protect piston rod from dirt, paint and damage
 - The gas spring must not be mechanically modified or damaged

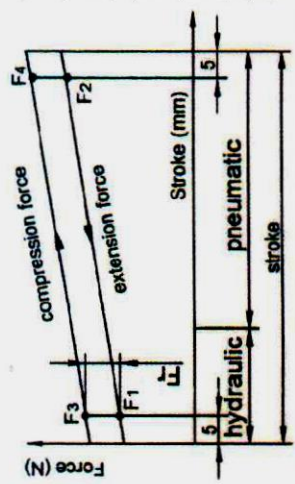

Force (N)